




MATRIX WALKWAY

The Versatile Walkway Panel!

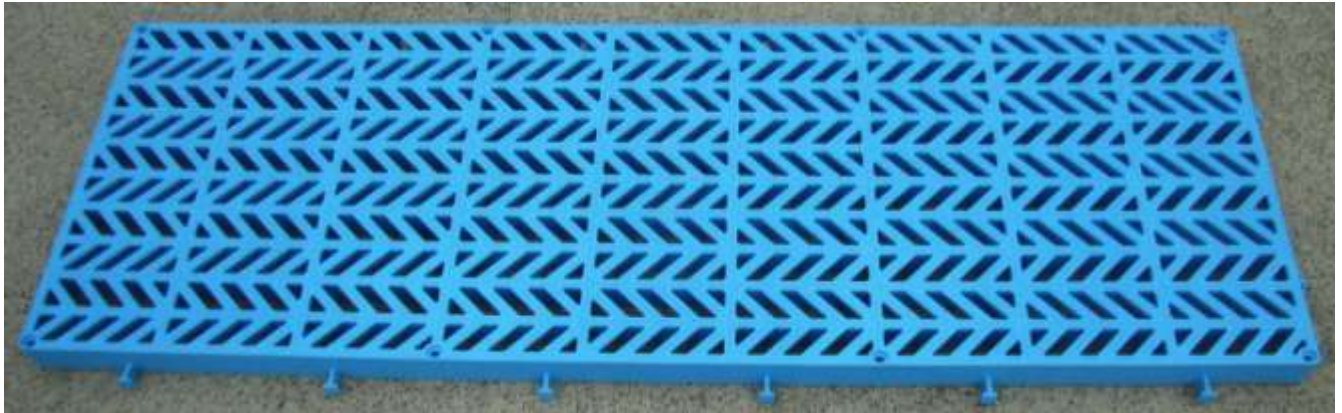

Matrix Walkway panels are a long lasting, low maintenance alternative to traditional materials used for walkway or platform construction.

They are ideal for jetties, boardwalks, decking, temporary floors, roof platforms, wet areas, attic or shed flooring, wash down bays, stairs, mats around swimming pools or machinery, etc.

Thousands of dimples cover the entire top surface to prevent slips, even when barefoot.

- More economical than alternatives over time
- Impervious to corrosion, rot, mildew or insects
- Friendly to aquatic environments - allow light, water and air through
- Open slots help to minimise storm damage
- Do not contain toxic chemicals
- Moulded in one piece from UV-stabilised polypropylene resin for strength & durability
- Unaffected by salt water and most chemicals
- Quick to install, clip together in either direction
- Recessed elongated screw holes moulded in
- Australian made and owned
- 15 year Structural Warranty



Standard Colours



Beige



Grey

Note: The colour chart above may not exactly match the actual colour and should be used only as a guide. Special colours available – MOQs apply.

Ph. 1300 361 771

www.designflow.com.au



MATRIX WALKWAY

TECHNICAL INFORMATION

INSTALLATION INSTRUCTIONS

Matrix Walkway panels must be installed across support beams with centre to centre spacing of 400mm. Full strength is achieved only with the panels running perpendicular to the support beams as shown in Fig.1.

Tabs of one panel fit into slots of the next panel. Tabs can be easily cut off visible edges of panels using a saw.

Adjoining panels must have a 5 to 6mm gap between them to allow for thermal expansion & contraction. Removed tabs can be used as spacers to achieve consistent gaps between panels (see Fig.2).

Screws must have a pan head with a diameter between 9.0mm and 11.5mm and must not be over-tightened as this will prevent thermal expansion, which will cause distortion and void the warranty. Appropriate screws are available from Design Flow.

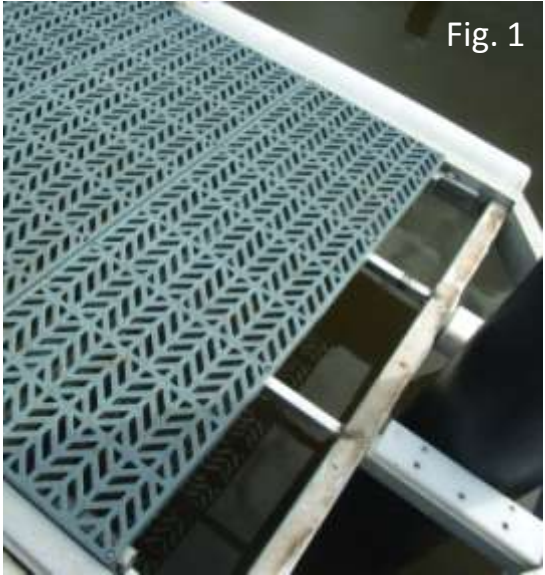


Fig. 1

SPECIFICATIONS

Material: Polypropylene Copolymer

Walkway Area (LxW): 1200x400mm = 0.48m²

Weight: 4.2kg approx.

Panel Dimensions inc. tabs (LxWxH): 1225x422x40mm

Qty per pallet: 56

In an ongoing commitment to product innovation Design Flow reserves the right to change specifications without notice.

APPLICABLE STANDARDS

AS/NZS 1170.0 - 2002 Structural Design Actions – General Principles

AS/NZS 1170.1 - 2002 Structural Design Actions – Permanent, Imposed and Other Actions

AS/NZS 3962 - 2001 Guidelines for Design of Marinas

AS/NZS 4997 - 2005 Guidelines for the Design of Maritime Structures

AS/NZS 1657 - 1992 Fixed Platforms, Walkways, Stairways & Ladders – Design, Construction & Installation

AS/NZS 2156.2 - 2001 Walking Tracks – Infrastructure Design

AS/NZS 4586 - 2004 Slip resistance classification of new pedestrian surface materials

Fig. 2



TEST RESULTS

It is up to the user to assess suitability of this product for the specific application based on the test results provided below.

TEST DESCRIPTION	TEST STANDARD	RESULT
Concentrated Load Test	AS/NZS 1170.1 Structural Design Actions	4.5 kN
Uniformly Distributed Load Test	AS/NZS 1170.1 Structural Design Actions	5 kPa
Wet Pendulum Slip Test	AS/NZS 4586:2004 Appendix A, Slider 55 (TRRL)	V
Wet Pendulum Slip Test	AS/NZS 4586:2004 Appendix A, Slider 96 (4S)	X
Dry Floor Friction Test	AS/NZS 4586:2004 Appendix B, Slider 96 (4S)	F
Wet Barefoot Ramp Slip Test	AS/NZS 4586:2004 Appendix C	C
Oil-Wet Ramp Slip Test	AS/NZS 4586:2004 Appendix D	R10

MATRIX PANELS™ IS A TRADEMARK OF DESIGN FLOW PTY LTD

4 Tova Drive, Carrum Downs, 3201, Victoria, Australia

Tel: 03 9775 0963 Fax: 03 9775 0964 Email: sales@designflow.com.au



Ph. 1300 361 771

www.designflow.com.au